

Installation Instructions

ALPHA 210A, 221, 221C and 430A

Unpacking

If you haven't already done so, carefully open the box and remove the contents. The following items should be enclosed:

- 1-ALPHA Electronic Message Center (210A, 221, 221C or 430A)
- 1-ALPHA Keyboard
- 1-ALPHA AC Adaptor
- 2-ALPHA Hanging Clips
- 1-ALPHA Programming Manual
- 6-ALPHA Mounting Feet
- 1-ALPHA Warranty Card


*Please save all packaging material in the event that reshipment of the ALPHA is necessary.
Please complete the enclosed warranty card and return it immediately to:*

*Adaptive Micro Systems, Inc.
7840 North 86th Street
Milwaukee, WI 53224*


Power Connection

The ALPHA is easy to power up. Just insert the connector of the AC Adaptor into the corresponding opening which is located on the left side of the ALPHA case. The AC adaptor may now be plugged into any standard 115 volt outlet. See *Figure 1*.

Figure 1

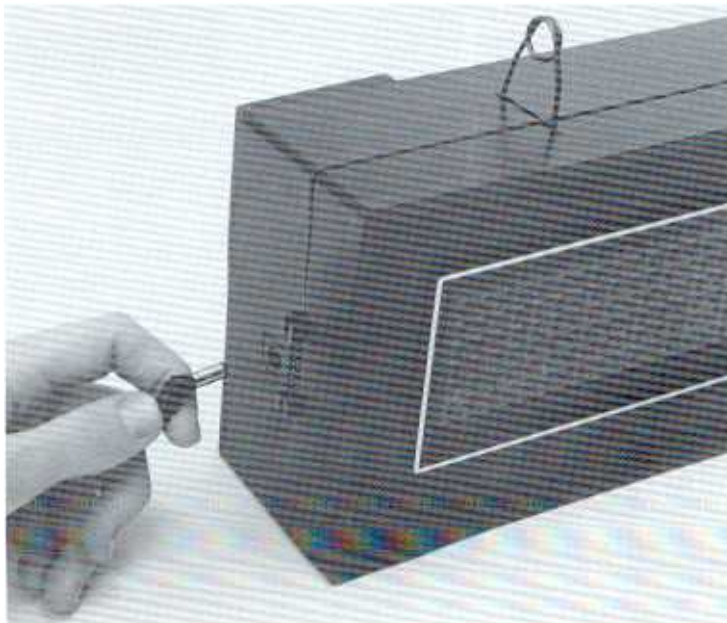

Model 210A

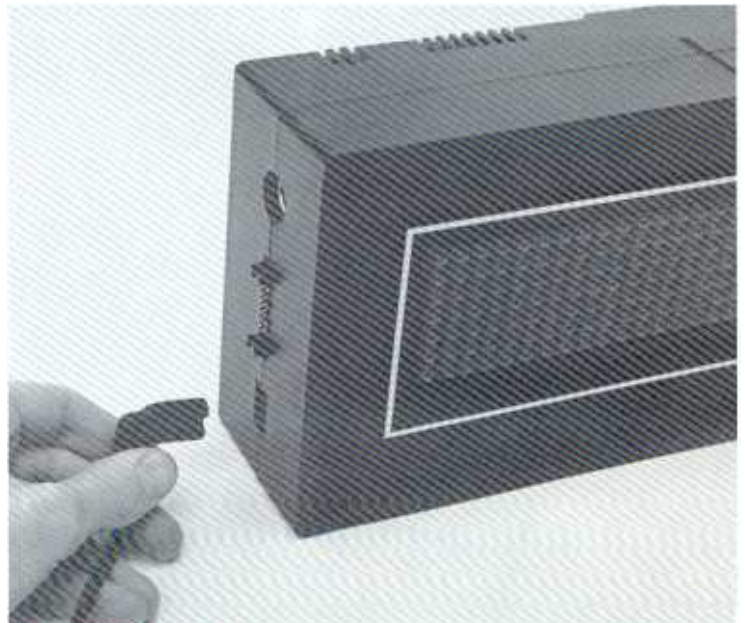

Models 221, 221C & 430A

Keyboard Connection

Insert the keyboard connector into the mating connector which is located on the left side of the ALPHA case. Note that the keyboard connector is keyed, and may fit only one way into the mating connector. See *Figure 2*.

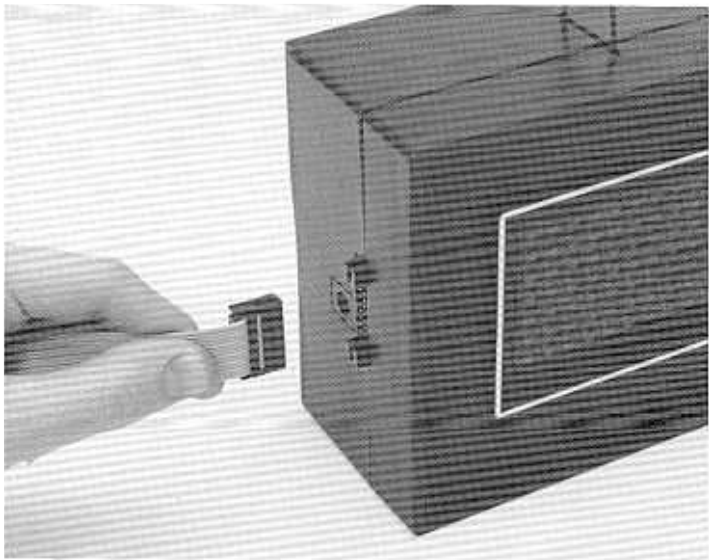


Figure 2

Mounting

The ALPHA was designed to be mounted in one of two ways. It may be wall mounted by using the holes provided on back of case, or it may be suspended from the ceiling by using the enclosed hanging clips.

Wall Mounting

The ALPHA may be wall mounted by providing two mounting anchors on the wall. Make sure that the mounting holes can withstand the 3-1/2 pounds of weight of the ALPHA 210A. (6 pounds for the ALPHA 221 & 221C or 11 pounds for ALPHA 430A).

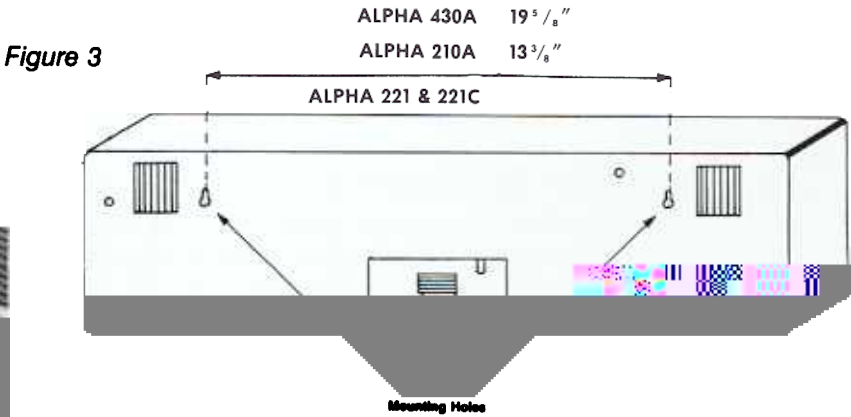



Figure 3



Figure 4

Ceiling Suspension

The ALPHA is provided with two hanging clips for use in ceiling suspension. When the clips are inserted into the top of the case, they provide a convenient means of attaching a chain which can

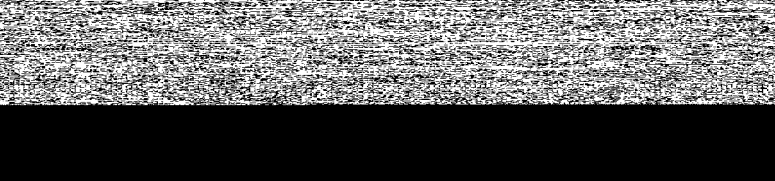

Tabletop Use

Enclosed with the mounting clips are six adhesive backed felt feet. These may be placed on the bottom of your ALPHA to prevent the bottom of the case from being scratched. Simply peel the feet off the backing paper and place them on the bottom of the ALPHA.